

# DC Combiners



Terrasmart Combiners are used for DC aggregation before the input of an inverter or charge controller. They provide a convenient location for O&M and disconnecting means. Combiners are highly configurable to fit any application.

## Product features


- Listed to UL-1741
- 275, 320, 400, and 600 Amp load break disconnects
- 75/90C Al/Cu output terminals
- Rated for continuous duty

## Additional options

- Mechanical lugs
- Provisions for compression lugs
- Isolating / grounded / floating configurations
- Touch safe protective cover
- Custom layouts
- 10kA SCCR and greater
- Battery and energy storage
- Transient surge suppression
- Breather and drain vents
- Pad-lockable enclosures
- Lockout / tagout provision
- Whips that connect SCC to the combiner box for faster in-field connections



Floating Disconnect Combiner, 1500VDC, 275A disconnect, 15 input circuits, transient surge protection, NEMA-4X fiberglass enclosure

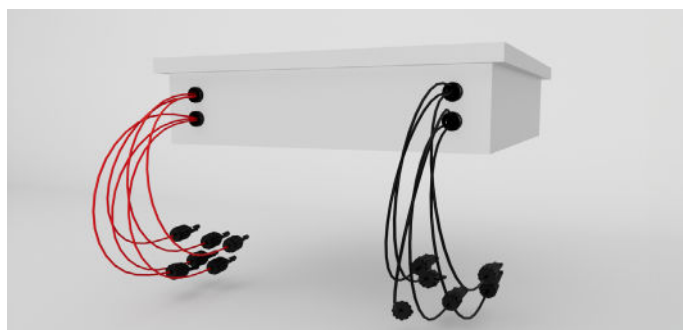

Pre-installed whips that arrive attached to the box

## Specifications

Voltage (Vdc)	1000 / 1500
Disconnect Ampacity	None / 275 / 320 / 400 / 600
Number of Input Circuits	1 to 36
Input Conductor Size (AWG)	#14 - 8 / #12-4
Fuse Size (Amps)	4 to 32 / 35 to 65

Number of Output Conductors Per Polarity	1 or 2
Output Conductor Size Range (MCM)	#6-350 / #2-600 / 300-800
Enclosure Dimensions (Inches)*	24x24x8 / 30x24x8 / 36x30x8
Enclosure NEMA Ratings	3R / 4 / 4X

\*Other options available upon request. Please note dimensions and weight may vary for any custom solutions. Contact us for details.

